



Bell Heater Construction and Emission Testing Workshop

With:

Alex Chernov
Stovemaster

Norbert Senf
Masonry Stove Builders

October 23-25, 2009

Caledon, Ontario

Bell Heater and Combustion Testing Workshop

Table of Contents

Bell Heater Construction and Emission Testing Workshop 1

 Table of Contents 2

 Outline..... 3

 Hands-on double-bell workshop component:..... 3

 Emission testing component:..... 3

Workshop Logistics 3

Goals 4

Safety 4

Classroom Sessions..... 5

Heater Core 5

 Test heater plan:..... 5

 Plan: 6

 Isometric: 7

 3D cross-sections:..... 7

Heater Facing 8

Heater Testing:..... 9

Combustion Chemistry 9

 Elementary analysis..... 11

 Combustion reactions 12

 Combustion air 12

Efficiency 12

 Latent heat loss 12

 Stack temperature 13

 Excess air 13

Wood Combustion 14

Emissions 14

 Carbon Monoxide – CO 14

 Particulates – PM (particulate matter) 15

 Volatile Organic Compounds – VOC’s 16

Combustion and emissions testing:..... 16

 Why Test?..... 16

 What are we trying to measure? 16

 Summary of the Heater Testing Cycle 17

 Example Research Question:..... 18

Instrument and Testing Concepts..... 19

 Calibration and Repeatability 19

 Data Quality..... 19

 Automated Testing 19

Using the Testo 330-2..... 20

Condar Dilution Tunnel 21

Using the Condar dilution tunnel..... 23

Appendix: TESTO 330-2 combustion analyzer..... 24

Appendix: TESTO 350 emission analyzer 25

Evaluation 26

Bell Heater and Combustion Testing Workshop

Outline

Hands-on double-bell workshop component:

Basic theory for bell heater design and construction.

Construction of a double-bell heater with black bake oven for a new [Lopez Labs](#) facility at Alex Chernov's property in Caledon, ON, about 30 minutes north-west of Toronto (10 min south-west from Orangeville, ON)

The test heater version is designed to allow changing volume of the bells for emission and efficiency testing of the same firebox design in different volume of the bells. The design also allows modifications to the major updraft channel sizing for testing of its influence on efficiency and emissions. Heater firebox is designed to allow testing of different combustion air supply methods. The heater will be faced using different masonry materials and techniques including [shiners](#) to test performance of such techniques.

Participants will be provided with real-life, latest firebox design drawings for this simple double bell heater and upon completion of the workshop will be able to build this heater on their own.

Emission testing component:

The objective is to provide interested participants with enough theory and hands-on practice to allow them to conduct efficiency and emissions testing on masonry heaters in the field. This will include specific recommendations, and hands-on experience with, equipment needed.

- Basic theory of combustion chemistry, emissions, and combustion testing.
- Setting up testing equipment for efficiency and emissions testing.
- TESTO 330-2 combustion analyzer
- Condar Dilution Tunnel – particulate (PM) testing
- Opacity measurement for real-time PM.

Workshop Logistics

This is an MHA sponsored workshop, and workshop fees will be donated to MHA to support the activities of the MHA Technical and Education Committees.

Workshop is limited to a maximum of 12 participants.

It is assumed that the emission testing component should attract masons with considerable experience in heater building. This, however, is not absolutely necessary. The workshop outline can be modified to suit the skill level of the participants. Basic masonry skills in both general masonry and refractory masonry are required for active participation in the hands-on portion.

Bell Heater and Combustion Testing Workshop

Interested people should reserve a spot by contacting either Alex Chernov 416-708-8139 alex_stovemaster@yahoo.ca or Norbert Senf 819-647-5092 mheat@heatkit.com

Workshop fee of \$250 CDN + 5% GST includes lunches.

A pizza party is planned for Saturday night. Pizza will be baked in a semi-precast oven built next to the lab: http://www.stovemaster.com/html_en/Semi_pre_cast_Brick_Ovens.html

Lodging is not provided.

Links to accommodation choices in nearby Orangeville, ON:

<http://www.thehillsofheadwaters.com/orangevillemotel/mem-welcome.php>

http://directory.orangevilledirect.info/Tourism_Lodging/Accommodation

http://www.bbcanada.com/ontario/greater_toronto_area/orangeville

<http://www.southerngeorgianbay.worldweb.com/OrangevilleON/Wheretostay/HotelsMotels/index.htm>

Alex's property address is: 20655 Shaws Creek Rd, Caledon, ON L7K 1L7

It is 1 hour drive from Toronto airport or city; and two and a half hours drive from Buffalo airport, NY. Those, who must take a flight from the States, check flights to Buffalo, NY, as it can be twice cheaper than flying to Toronto. Let Alex know if you need directions.

Bring a notebook.

Goals

Our goal is to build the heater in two days allowing the third day for a sample emissions test run. High level of participation in the hands-on portion is absolutely necessary to achieve this goal. We rely on your commitment to achieve our goals for the workshop.

The workshop covers a very wide spectrum of knowledge and information in both theory and practical application. Get ready to absorb a lot of information in three intense days, and get ready to work hard on the hands-on portion.

Safety

During the practical component of this workshop, participants will be exposed to regular construction site conditions. It is therefore expected that all participants will wear appropriate personal safety protection.

All participants must bring their own safety equipment:

- Safety boots or closed toed shoes (no sandals)
- Eye protection
- Hearing protection
- Dust mask
- Gloves (rubber and construction)

Bell Heater and Combustion Testing Workshop

Participants should expect to be working with refractory and clay brick, concrete block, clay mortar, and ceramic wool. Participants should bring their own basic hand tools (trowels etc.) and should expect to be working with the following power tools:

- Wet saw
- Small and large angle grinders.

Classroom Sessions

A 1 to 1.5 hour classroom session will be held each morning.

The first classroom session will have an overview of the hands-on workshop and basic theory for bell heater design and construction, but the main focus of the classroom sessions will be combustion and emission testing theory.


Specific aspects of hands-on portion will include:

- Safety
- Overview of the test heater core construction.
- Overview of the heater drawings.
- Specifics of the test heater design version in comparison to the real-life heater.
- Overview of heater facing options.
- Questions and Answers. Goals for two days of heater construction.

Heater Core

Test heater core will be built using 2" firebrick with 2 1/2" firebrick inner firebox liner. Firebrick will be laid in clay mortar. The firebox will have all possible air supply systems: two grates (one at the front and one at the back) and secondary air outlets in the walls.


Test heater plan:

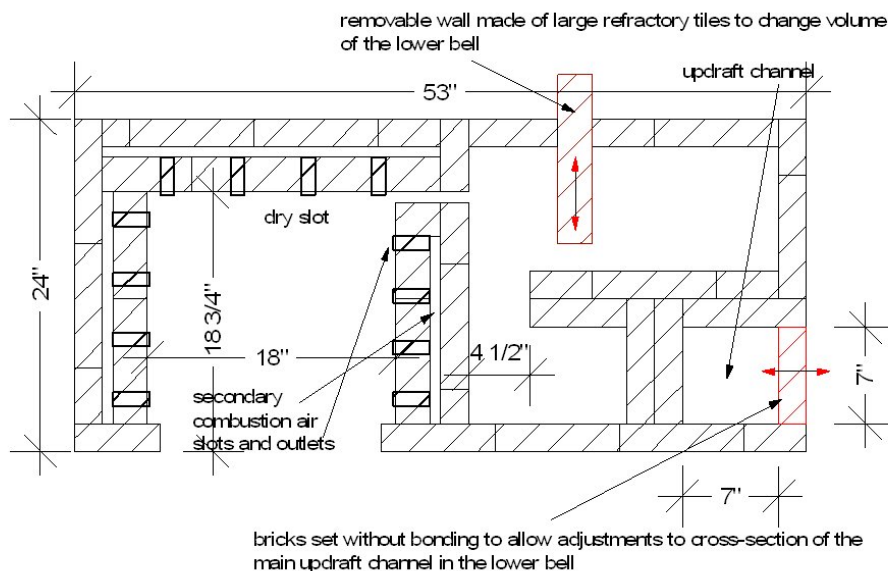

Bell Heater and Combustion Testing Workshop


A full set of construction drawings for this heater will be distributed to the participants. Heater core is designed using 2 1/2" firebrick and large refractory tiles 12"x24"x2 1/2". The heater is designed for 50-55lbs load of hardwood. Nominal heat output under two full loads a day is 20-23000 Btu hr.

Plan:

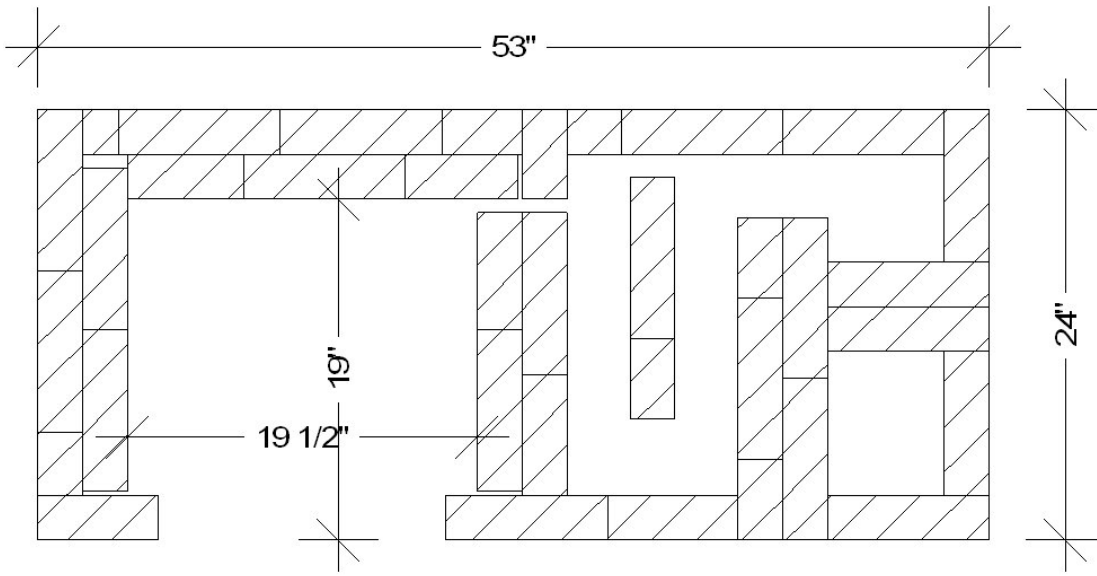


Bell Heater and Combustion Testing Workshop


Isometric:

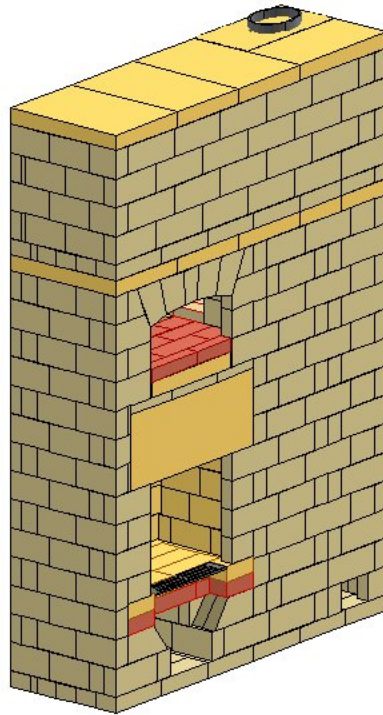

3D cross-sections:

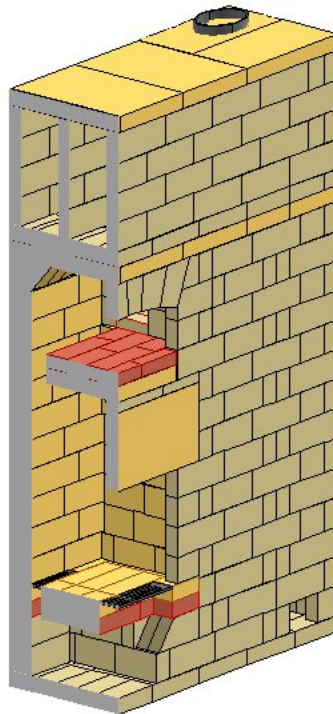


Bell Heater and Combustion Testing Workshop

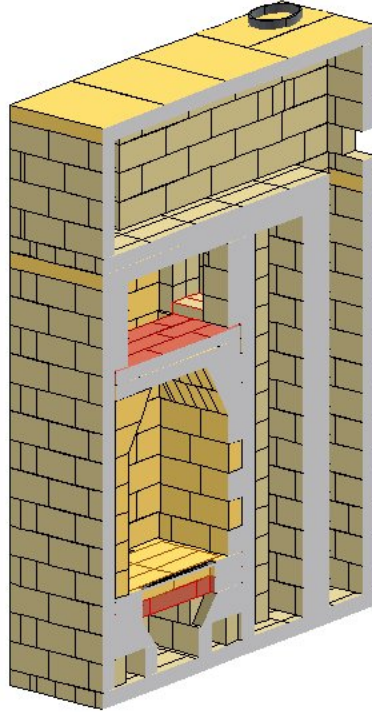

Heater Facing

The test heater will be faced using combination of the following materials: dry-stacked cement block, cement bricks shiners, firebrick shiners, clay brick.

Heater Testing: Combustion Chemistry

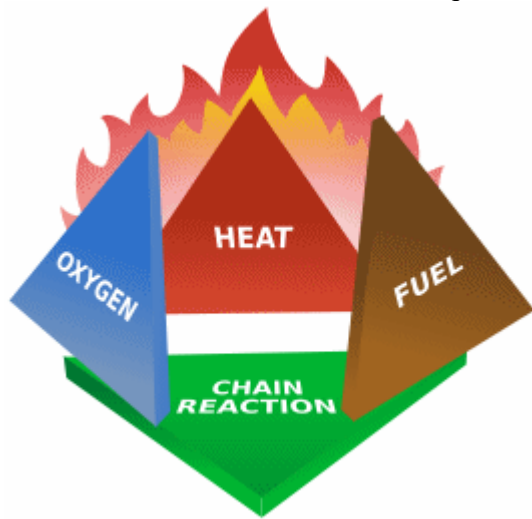

Bell Heater and Combustion Testing Workshop



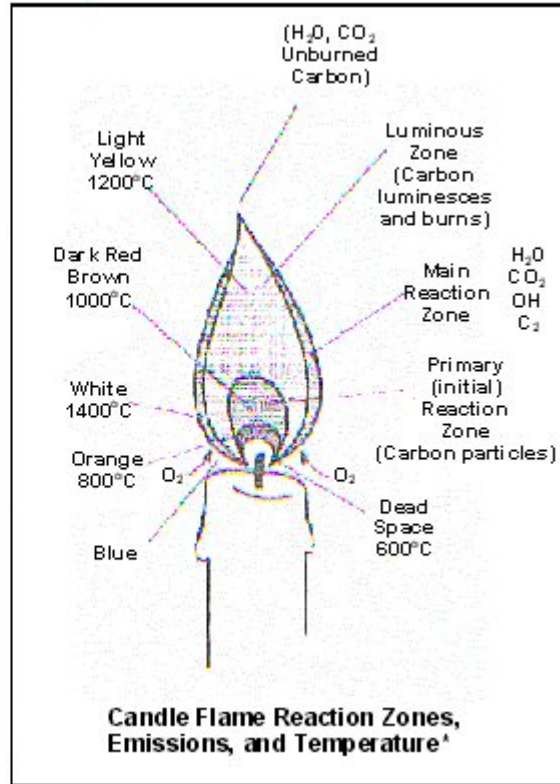



Photo courtesy [NASA](#)
Fire forms a sphere in microgravity.

Bell Heater and Combustion Testing Workshop

1. Proximate analysis

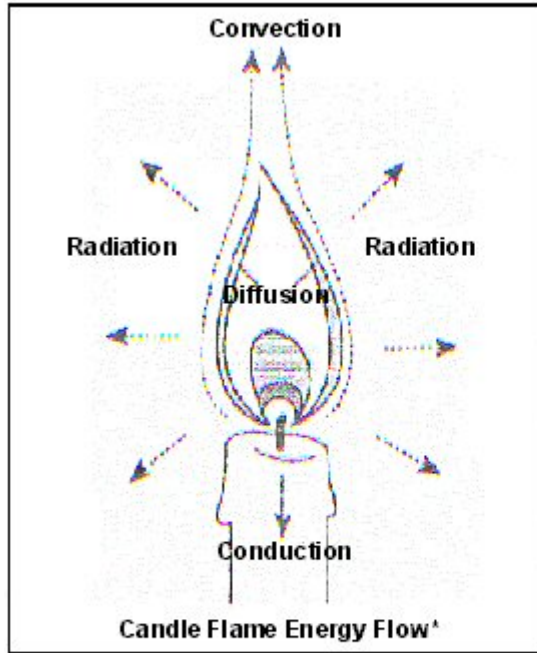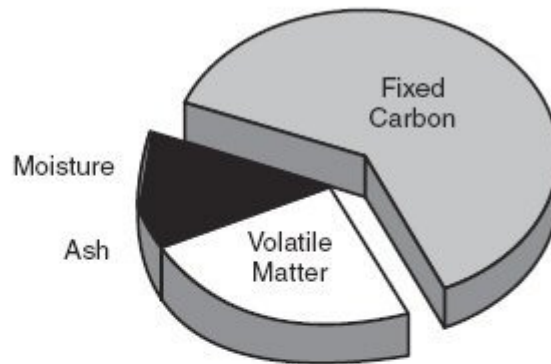

2. Ultimate analysis:

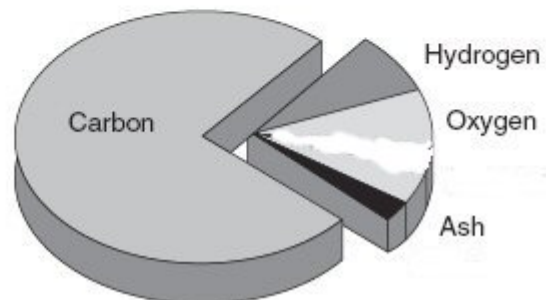

Elementary analysis


Wood has a complicated chemistry, but it can be broken down into an elementary analysis as follows:

Carbon	(C)	41.0%
Hydrogen	(H ₂)	4.5%
Oxygen	(O ₂)	37.0%
Water	(H ₂ O)	16.0% (Air dried)
Ash		1.5%


Bell Heater and Combustion Testing Workshop

Combustion reactions


During complete combustion, the following reactions take place:



During incomplete combustion, we get:



All of these reactions are exothermic. They result in a conversion of chemical energy into heat:

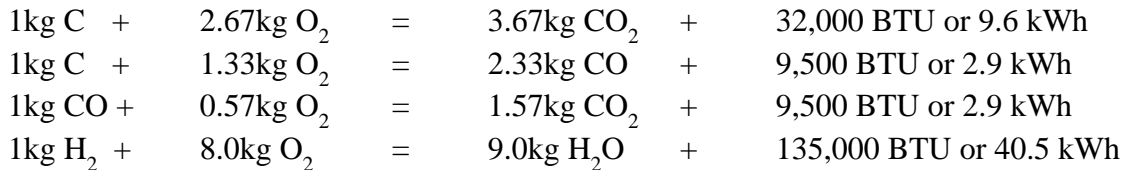

Combustion air

The theoretical combustion air requirement is 3.6 cubic metres per kilo of (dry) wood. This is known as stoichiometric air, or 100% excess air.

In reality, more than the theoretical amount of air is required, since some air passes through the firebox without taking part in the combustion. This is called excess air.

$$\text{Excess air} = \text{CO}_2\text{max.}/\text{CO}_2\text{measured}$$

The maximum CO₂ possible in wood fuel flue gas is 20.9%

For good combustion, we need around 200% -- 300% excess air.

Efficiency

Combustion efficiency measures how much of the wood's chemical energy is released during the burn. This is typically around 96 - 99% for most good masonry heaters. The chemical loss consists of unburned carbon monoxide and hydrocarbons that exit the chimney.

Heat transfer efficiency measures how good the appliance is at delivering the released energy to your house instead of out the chimney (stack). One way to define it is in terms of stack loss, something that can be measured with combustion testing equipment.

For wood, we will ignore the fact that the wood changes continuously in chemical composition as it goes from cordwood to charcoal, and assume an average composition. We've already dealt with the chemical loss due to incomplete combustion. There are three other types of stack loss.

Latent heat loss

This results from the fact that you are burning hydrogen into water, and not condensing it from the flue gas to recover the "heat of vaporization". You are also boiling off the liquid water content of the wood into water vapor. It takes about 2,000 BTU to turn a kg of liquid water at

Bell Heater and Combustion Testing Workshop

212°F to a kg of gaseous water at 212°F. Note that this loss does not involve a change of temperature, but rather a change of state from liquid to gas. It is termed latent heat, as opposed to sensible heat which is something you can sense as a temperature change. This is an unavoidable loss, unless you use a condensing chimney to reclaim the latent heat, as in a high efficiency gas furnace.

For wood that is at 20% moisture content, this ends up being about a 13% loss. In Europe, efficiency is defined using the lower heating value (LLV) of wood rather than the higher heating value (HHV) as in the North American definition. In other words, the latent heat loss is not counted. To translate a European efficiency number to an equivalent North American number, you need to subtract 9 – 13%, depending on the moisture content of the wood.

Stack temperature

The gas leaving the chimney is above ambient temperature, which represents an efficiency loss. The stove is usually designed to keep the temperature in the chimney gas above 200°F to prevent water condensation, which is undesirable unless your chimney is built specifically to handle it. You also need to maintain draft, which is difficult to do below about 150 °F. Some jetted combustion air system only function well with strong draft, requiring a higher chimney temperature. In Kachelofen design, 350 °F is a typical exit temperature from the heater into the chimney.

Excess air


If you are moving excess air through the system, it ends up at the stack temperature. Therefore, the more excess air, the higher the loss. With a masonry heater, we can pretty much pick whatever stack temperature we want in the design process. The main challenge is controlling excess air. Wood needs 200% to 300% excess air, or complete combustion will be hard to achieve and we will see elevated CO levels in the stack.

It is interesting to note that the theoretical maximum efficiency possible with a non condensing woodburning system burning wood at 20% moisture is about 83% overall efficiency.

Overall efficiency = Combustion efficiency × Heat transfer efficiency.

A very good real world number for a masonry heater is about 75% overall.

Wood Combustion

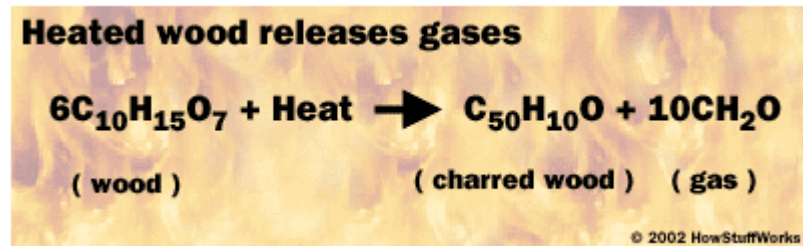

- The (gas) portion of the above equation represents the intermediate combustion products
- In smoldering combustion, some of these intermediate products produce tars
- In flaming combustion, tars don't form. Instead, soot particles form
- In clean combustion, the soot particles burn to CO₂

Emissions

Carbon Monoxide – CO

- Colorless, odorless gas
- Harmful to health in small concentrations, particularly long term
- Poisonous, can cause death in large concentrations
- Oxidizes to CO₂ in the atmosphere, so is usually a localized problem
- CO problems are usually associated with urban areas and automobiles
- Measurable with a gas analyzer

5.4.3 General Behavior of Hot CO

In practice, CO emissions have high sensitivity to combustion conditions. We know that CO increases as oxygen and temperature decrease. We also know that the difference between low levels of CO (<200 ppm) and high levels (>2000 ppm) can be 0.1% to 0.2% mole fraction O₂. In other words, CO production is highly nonlinear with respect to temperature and oxygen fraction.

Bell Heater and Combustion Testing Workshop

Particulates – PM (particulate matter)

Soot



- Requires a flame to form
- Carbon (“lamp black”)
- Black smoke
- Very lightweight. You can have black smoke, yet a low PM number
- Test filters are black, but have no smell
- Measurable by sucking through a filter
- Doesn’t require a dilution tunnel to measure, because there is nothing to condense

Tar

- Requires absence of flame (smoldering) to form
- Complex, semi-volatiles
- Condense at different temperatures
- Blue smoke. Smoke is blue from diffraction of light, due to the very small particle size
- 90% of particles are smaller than 1 micron (= 0.001 mm)
- The wavelength of blue light is 0.5 microns
- Contains PAH’s – polycyclic aromatic hydrocarbons – a major health concern, can be carcinogenic

PM2.5

- particulate matter smaller than 2.5 microns
- A blood corpuscle is 6 microns, so these particles are in the biologically active size range
- Measurable with a filter, but requires cooling first, by diluting with air (dilution tunnel)
- Heavy, gives a high PM number
- Test filters have a very distinctive “creosote” smell. If there is no soot, the filter can be yellow, like a cigarette filter

Bell Heater and Combustion Testing Workshop

Volatile Organic Compounds – VOC's

- No universal definition
- Some don't condense into particulates at outdoor air temperatures
- Therefore not measurable with filters

Combustion and emissions testing:

Why Test?

- Research and Development: - build better heaters
- Field Certification: - verify that a one-off custom heater performs properly

What are we trying to measure?

- Efficiency, so that we burn less wood
- Emissions, so that we minimize air pollution and ***comply with regulations***

Bell Heater and Combustion Testing Workshop

Summary of the Heater Testing Cycle

1) Measure the fuel going into the firebox

- Descriptive: Wood species, wood geometry, kindling sequence
- Quantitative: Weight, number of pieces, length, circumference, moisture content

2) Measure what comes out the stack

- Stack temperature
- Stack gas composition: oxygen or carbon dioxide, carbon monoxide
 - Nitrogen does not change, so no need to measure it
 - Also don't need to measure water vapor, oxides of nitrogen, sulfur
- Emissions
 - Particulates (smoke and soot)
 - CO (already covered by gas analysis)

3) Calculate

- Can be automated with computerized spreadsheet templates
- Does not require specialized knowledge anymore, except to interpret the results

4) Display Results

- We are looking at extremely complicated phenomena
- It would be nice to get easily comparable results, but that remains a dream
- Graphic results such as time lapse photography, and the shape of curves on graphs, help to make sense of it all and lead towards insight

5) Analyze


- Once you have many results, you can start to mine them for insight
- Quality control of the data is job #1, otherwise you are mining garbage

6) Document

- MHA wants to develop a certification program for heater field testing
- By standardizing the procedure and the data reporting, it will allow us to build a long term performance database
- This will benefit the heater community and the environment
- It also enables us to be pro-active in the regulatory realm, with a credible supplement to existing approaches

Bell Heater and Combustion Testing Workshop

Example Research Question:

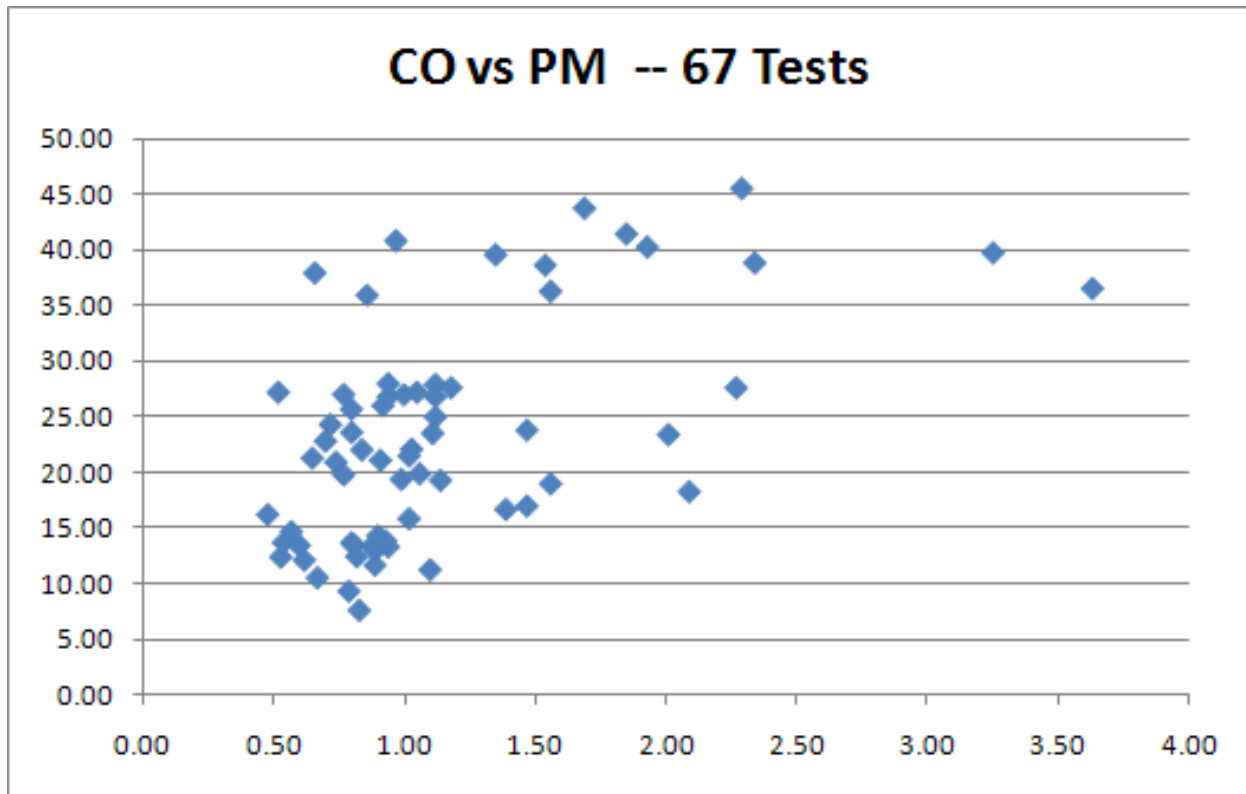

Is there a relationship between CO numbers and PM numbers in masonry heaters?

- This is an example of an open technical question.
- In North America, PM emissions are regulated. In Europe, CO emissions are regulated.
- Europe is starting to regulate PM
- CO is easy to measure with a gas analyzer
- PM is tricky and expensive to measure, requiring a laboratory dilution tunnel setup.
- Fortunately, PM measurements in heaters can be simplified because we don't make tar. This allows us to use the Condar portable dilution tunnel, do field testing, and get reliable numbers.
- This was only learned by experience. MHA and Lopez Labs has pioneered this approach
- European heater testing until recently was for CO only, and the assumption was always that a clean burn in terms of CO will also give you a clean burn in terms of PM
- Based on the above graph, what do you think?
- Measurement always trumps assumptions

Instrument and Testing Concepts

Calibration and Repeatability

- Difference between precision and accuracy
- Calibration gas
- Zero and Span
- Drift
- Within Laboratory Repeatability
- Inter Laboratory Repeatability
- Instrument certification by EPA ([Testo 350](#))

Data Quality

- Q&A Standards
- Traceability
- Chain of possession

Automated Testing

- State of technology
- Software
- Instrument features: auto dilution, auto zero, auto rinse

Using the Testo 330-2

Description

- Portable flue gas analyzer
- Commonly used by chimney sweeps in Germany to verify gas and oil furnace efficiency, which is required by law
- Measures draft, stack temperature, O₂, CO
- Automatic operation by computer possible

Calibration

Operation

- CO dilution
- Monitoring the sample pump rate

Data Collection and Storage

- Samples continuously. 30 sec. is a reasonable sample interval to set, otherwise the data file gets too large
- Real time data display and gas graph
- Data file is exported as an Excel spreadsheet, after the test is finished

Maintenance

- Sensors
- Calibration records
- Filters
- Water trap
- Cleaning

Condar Dilution Tunnel



Appendix 3: Portable Emissions Sampler

Based on Applied Research Services Technical Bulletin 72 (2005)

The portable emissions sampler captures particulate emissions using a method based on Oregon Method 41 (OM41). This method is also known as the Condar Method.

Principle of operation

The sampling head includes a dilution system to dilute and cool the flue gas. This simulates the dilution and cooling that occurs when flue gases mix with ambient air, and results in condensation of oily compounds such as polyaromatic hydrocarbons, which can then be captured on the filter.

Flue gases are drawn into a manifold through the sample probe. Dilution air is also drawn into the manifold through small holes in its face. The diluted gases are then drawn through two filters, which collect the particulate emissions.

Details of the sampler

General

The sampler includes a sampling head (detailed below), which captures the sample of particulates. In addition, flue temperature is measured, flue gases are analysed continuously for oxygen and carbon dioxide content, and the carbon dioxide content of the diluted gas stream is analysed. The sampler also contains gauges to monitor and set gas flows through the sample head and flue gas analysers, canisters of drying agent to remove water vapour from the gas streams, a gas meter to quantify the sample flow, and a vacuum sensor to monitor filter loadings.

The sampler contains two analysis trains, which are programmed to start and stop at a flue temperature of 100°C. The calculation of the emissions rate is made using results from both analysis trains. The first sampling train draws diluted flue gases on to a filter and gives the weight of particulates per litre of flue gas (Wp/V). The other sampling train performs a gas analysis, which gives the volume of flue gas per kg (dry weight) of fuel burned (V/Wf). This is done directly from the analysis and does not rely on a knowledge of how much fuel was burned.


The chemistry of the process means a fixed amount of fuel requires a well-defined volume of air to burn it completely and generate a known volume of flue gas. If exactly this amount of air is supplied, then the volume of flue gas produced per kg of fuel burned is also known. Under these conditions the flue gases contain no oxygen (it would have all been used up). In reality additional air is supplied. This additional air will dilute the flue gases and result in a measurable amount of oxygen in the flue gases, which allows the degree of dilution to be calculated and hence the actual volume of flue gas per weight of fuel burned.

Dividing the first result by the second ($[(Wp/V)/(V/Wf)]$) gives the emissions rate (Wp/Wf). Filters on the samplers were changed daily, and where possible the sampler was run for seven days in each household. The sampler is interfaced to a laptop computer, which activates the sampling pump when the heater is operated and the flue temperature rises. The computer is also used to log data.


Sampling head

The sampling head consists of a stainless steel dilution manifold (length 100 mm, internal diameter 49 mm) fitted with two end caps. One end cap is fitted with a short probe with a glass insert. The probe is inserted into the flue so that the inlet is near the flue centre. Dilution air is admitted to the manifold via 12 x 1 mm diameter holes in the face of the end cap. The sample is collected on two 47 mm glass fibre filters (Gelman Type A/E Cat No 61631) mounted on two filter holders fitted to the other end cap of the manifold.

Bell Heater and Combustion Testing Workshop

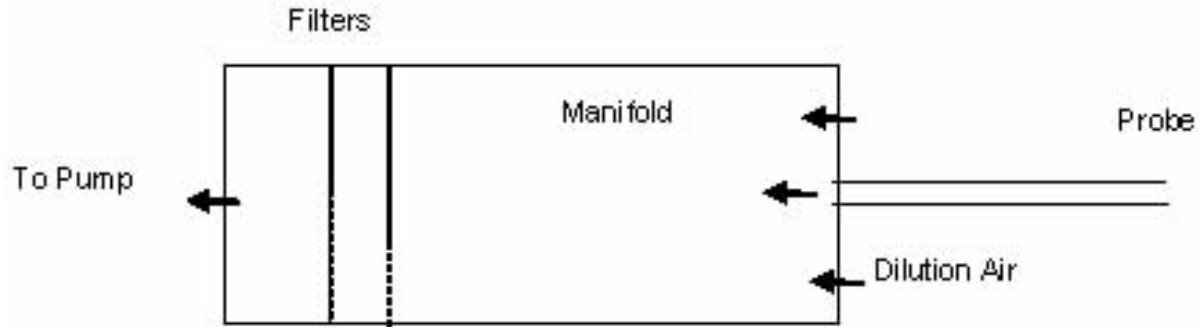

Schematic of Condar Dilution Tunnel

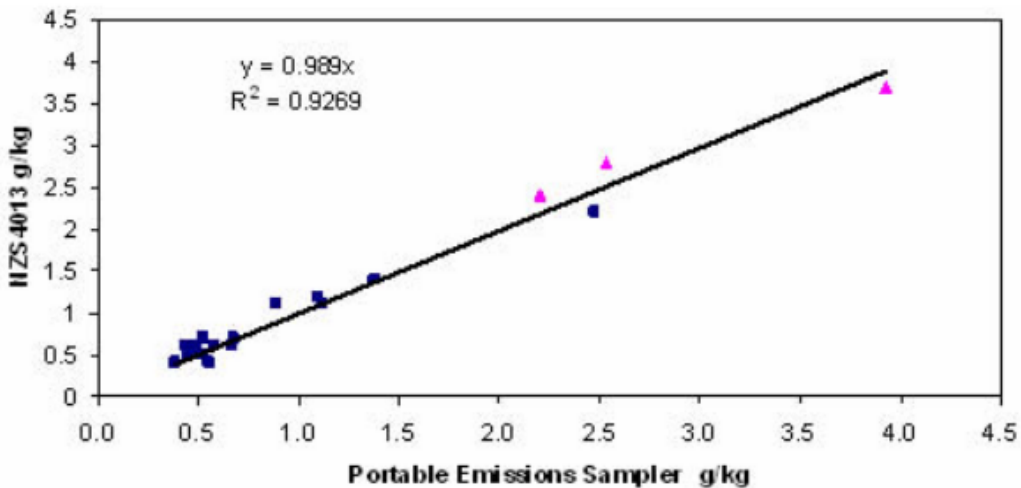

Text description of figure

This is a scatter plot showing emissions results from NZS4013 in grams per kilogram on the y-axis. Emissions using the portable emissions sampler is given on the x-axis in grams per kilogram. A line of best fit is drawn where $y = 0.989x$ with an R squared value of 0.9269.

Comparison Between Condar and Laboratory Dilution Tunnel Method

Using the Condar dilution tunnel

Filters

- Description
- Handling
- Static electricity
- Dessication
- Weighing
- Loading
- Unloading
- Reweighing
- Filing

Operation

- Maintaining constant sample rate

Appendix: TESTO 330-2 combustion analyzer



testo 330-2 LL

technical data:

Parameter	Measuring Range	Accuracy
O ₂ Long Life Sensor	0 to 21 Vol. %	±0.2 Vol. %
CO, (H ₂ -compensated) Long Life Sensor	0 to 8,000 ppm	±10 ppm or ±10% rdg. at 0 to 200 ppm ±20 ppm or ±5% of rdg. at 201 to 2,000 ppm ±10% of rdg. at 2,001 to 8,000 ppm
Auto CO dilution	8,000 to 30,000 ppm	
NO	0 to 3,000 ppm	±5 ppm at 0 to 100 ppm ±5% of rdg. at 101 to 2,000 ppm ±10% of rdg. at 2001 to 3,000 ppm
NO (low meas.)	0 to 300 ppm	±2 ppm at 0.0 to 40.0 ppm ±5% of rdg. at 40.1 to 300.0 ppm
Draft and pressure	-4 to 16" H ₂ O 0 to 80" H ₂ O	±0.2" H ₂ O at 0 to 20" H ₂ O ±1% of rdg. at 20 to 40" H ₂ O 1.5% of rdg. at 40 to 80" H ₂ O
CO ₂ (calculated)	0 to CO ₂ max	
Temperature	-40 to 1832°F	
Efficiency	0 to 100%	

specifications:

Description:	
Operating temp range:	23 to 113°F
Storage/transport range:	-4 to 122°F
Power supply:	lithium ion rechargeable, AC 6.3V/1.2A
Dimensions:	10" x 3.5" x 2.5"
Weight:	1.5 pounds
Memory:	400 locations
Display:	Monochrome, 160 x 240 pixels
Battery charge time:	>6 hours

Warranty:	
Instrument:	48 months
Sensors:	
CO & O ₂ sensor:	48 months
NO sensor:	24 months
Flue gas probe:	24 months
Thermocouple:	12 months
Rechargeable battery:	12 months



Optional probes:
 Ambient CO 0 to 500 ppm
 Gas Leak 0 to 10,000 ppm
 Ambient CO₂ 0 to 10,000 ppm



Long lasting pre-calibrated sensors

testo, Inc. • 800-227-0729 • e-mail: info@testo.com • testo350.com

Appendix: TESTO 350 emission analyzer

testo 350: Emission Analyzer

- testo 350
- Specifications
- Software
- Kits
- Literature
- Accessories
- Applications
- Firmware

testo 350

The total solution for emission testing and combustion analysis

The testo 350 emission analyzer – the world's most advanced – provides compliance level accuracy, extreme testing flexibility, and the highest performance. It's no wonder why the testo 350 is chosen by more professionals for emission testing and process monitoring. Simply put, for every combustion application, it's the only choice.

Now with Wireless Bluetooth 2.0
[LEARN MORE!](#)

Analyzer Box

- Greater accuracy with Testo exclusive Low NOX and Low CO sensors
- Continuous temperature compensation and sensor temperature control
- Wide testing ranges with integrated sample dilution systems
- Advanced NDIR technology for accurate CO2 measurement
- Superior sample conditioning for True NOX results
- Powerful pumps for fast response

Control Unit

- Simple handheld operation provides greater testing flexibility
- Display and print the values you want
- Operate docked or remotely

Sampling probes – PDF (84 KB)

The widest and most complete line available



US EPA ET[✓] Verified
Advanced Testing Program

Recommended for testing using:

- US EPA CTM-030
- US EPA CTM-034
- ASTM D6522
- CA 1110.2
- And state and local testing

[Click here for more info.](#)

Evaluation